




FEASA™ OPTICAL HEAD OH-10

Product Datasheet

OH-10

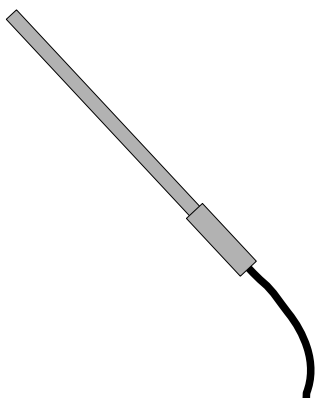


Application

For Testing High Intensity LEDs that are located as close as 1.5mm centre to centre on a PCB.

Supplied with 1mm POF Fiber.

Temperature Range 0°C - 70°C

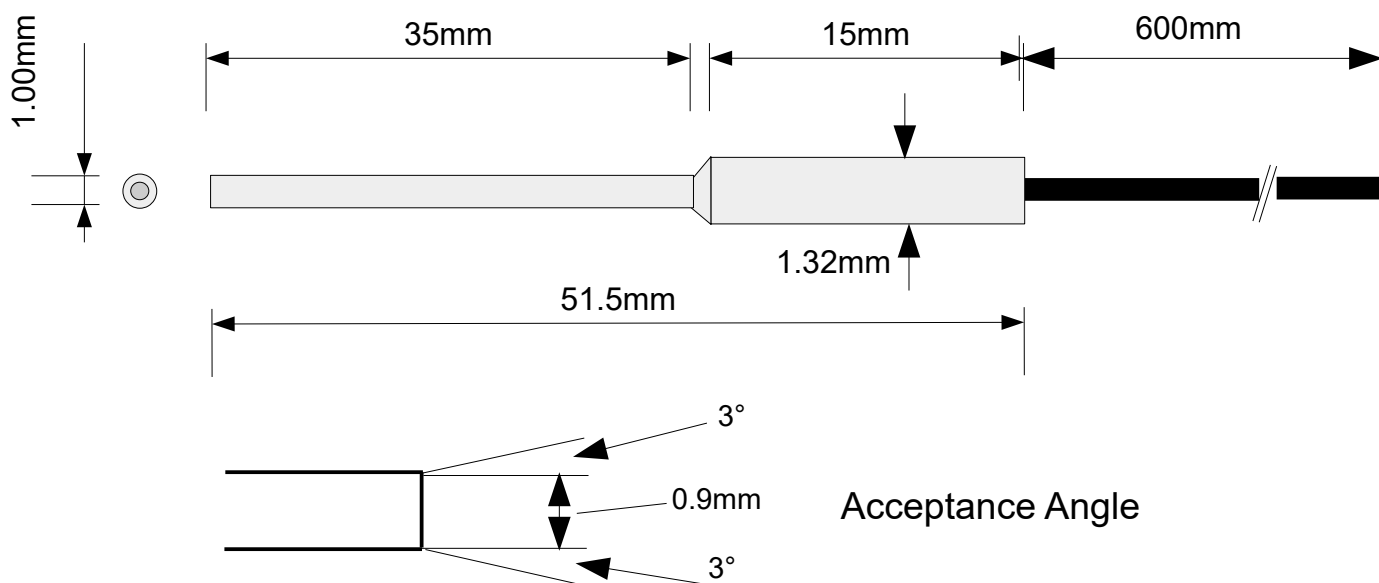

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric		Length not Including Fiber	Minimum Centre to Centre Distance
OH-10	0.039 in 0.040 - 0.036	1.00 mm 1.016 - 0.9144		51.5mm	1.5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.


Page 1 of 2

Rev No.06 - 20th May 2026



FEASA™ OH-10 Optical Head Product Datasheet

OH10 Mounting Block

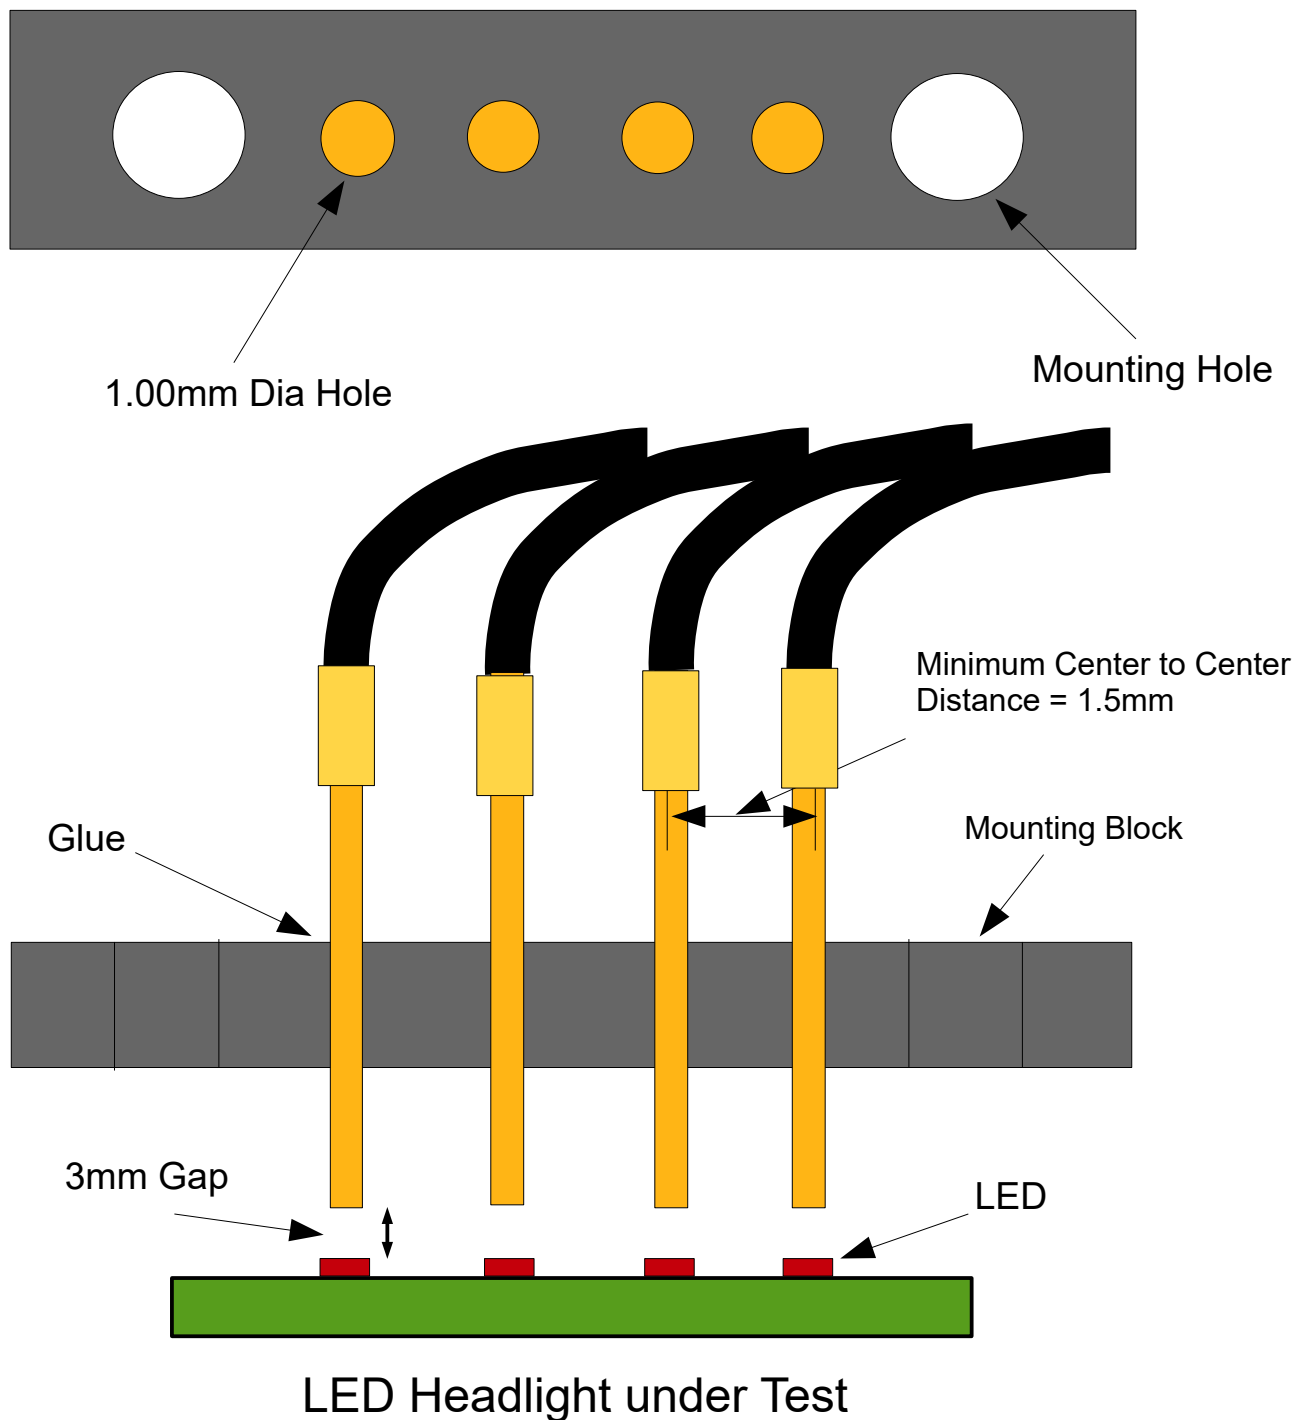

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.
Registered in Ireland, No. 106933. Copyright © 2014 Feasa Enterprises Limited. All rights reserved.

Page 2 of 2

Rev No 05 -13/08/2025

