



FEASA™ OPTICAL HEAD OH-2

Product Datasheet



OH-2



Application

For Testing Medium Intensity LEDs that are located as close as 5mm centre to centre on a PCB. Designed to fit where space is limited.
For use with 1mm POF Fiber.

Temperature Range 0°C - 70°C

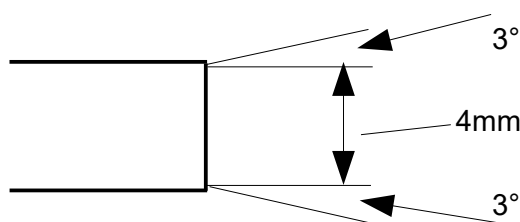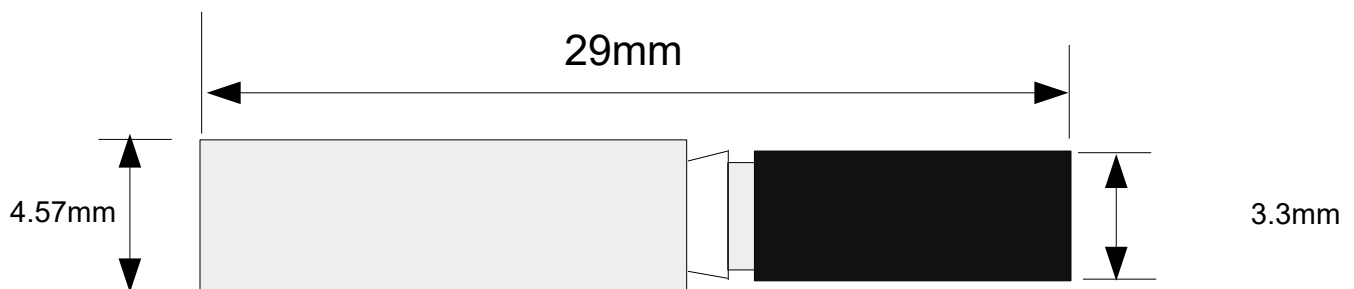

Acceptance Angle

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-2	0.180 ±0.002"	4.57 ±0.05	4.55mm	29 ± 0.5 mm	5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.

Page 1 of 1

Rev No.05 -20th May 2026