




FEASA™ OPTICAL HEAD OH-21

Product Datasheet

OH-21


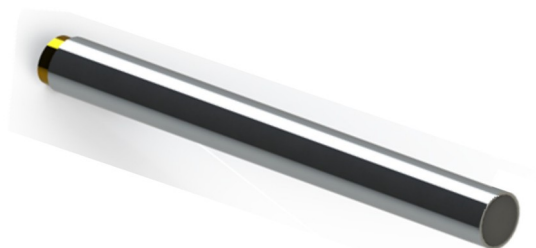


Application

For Testing Medium Intensity LEDs that are located as close as 2.8mm centre to centre on a PCB. Designed to fit where space is limited.

For use with 1mm POF Fiber. Fiber is attached using Epoxy Glue

Temperature Range 0°C - 70°C

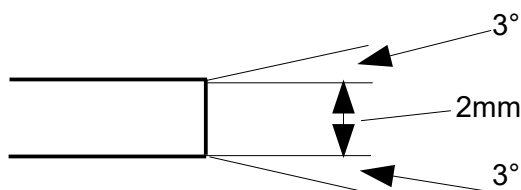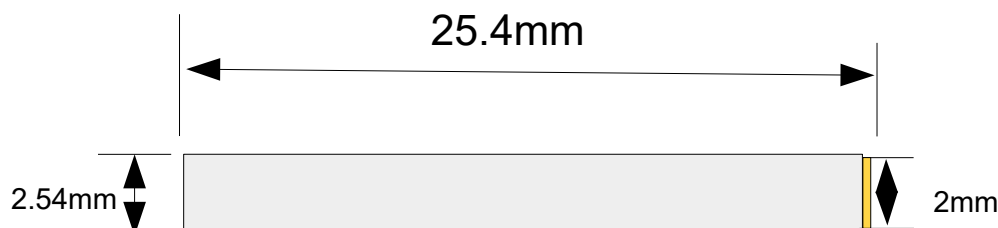

Acceptance Angle

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-21	0.10 ± 0.001"	2.54 ± 0.05	2.5 mm	25.4mm	2.8mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.