



FEASA™ OPTICAL HEAD OH-30s

Product Datasheet

OH-30s




Application

For Testing Large Diameter, Medium Intensity LEDs that are located as close as 13mm centre to centre on a PCB in confined spaces.

For use with 1mm POF Fiber.

Temperature Range 0°C - 70°C

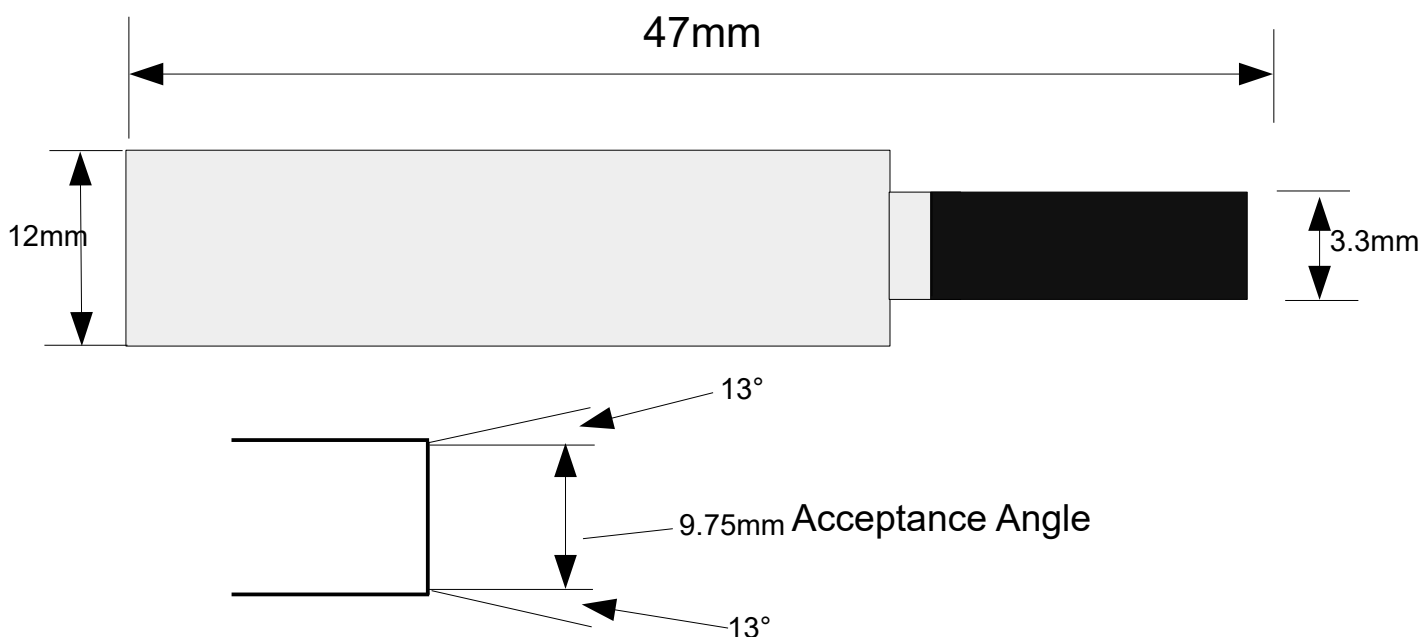

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-30s	0.472 ±0.001"	12mm ±0.02	12mm	47 ± 0.5mm	13mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.