



FEASA™ OPTICAL HEAD OH-34A

Product Datasheet

OH-34A




Application

For Testing High Intensity Side-Emitting LEDs that are located as close as 9mm centre to centre on a PCB.

Recommended for use with RGB & Low Light Led Analysers

For use with 2.2mm POF Fiber.

Temperature Range 0°C - 70°C

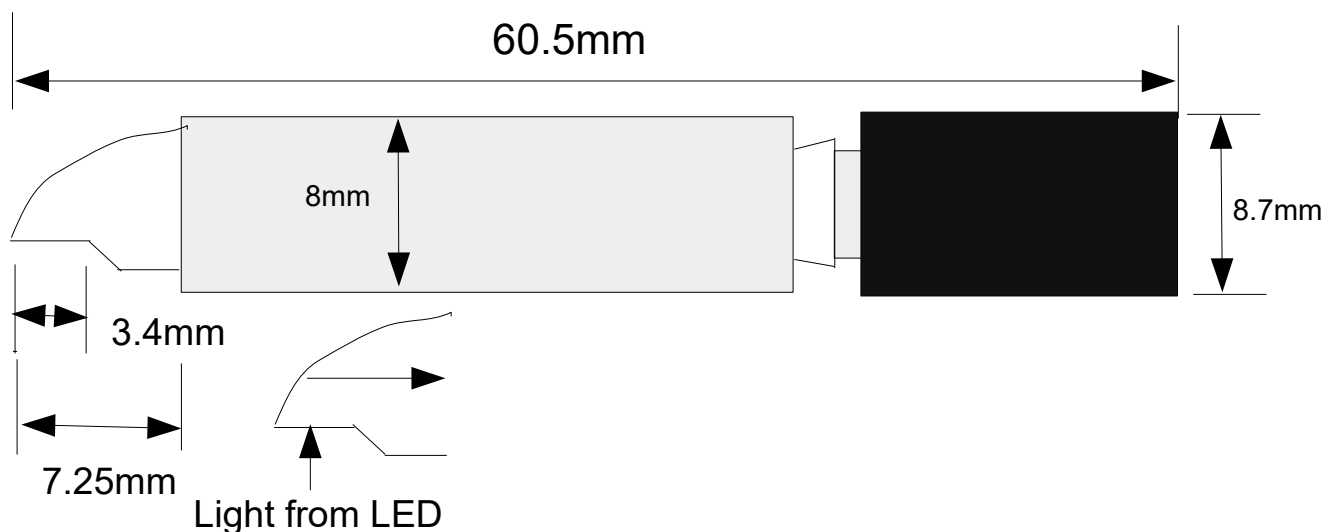

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-34A	0.315 ±0.001"	8mm ± 0.02	8mm	60.5mm ± 0.25mm	10mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.