



FEASA™ OPTICAL HEAD OH-36A

Product Datasheet

OH-36A




Application

For Testing High Intensity LEDs with the Feasa Low Light & RGB LED Analyser. Minimum LED centre to centre distance on a PCB 9mm.

For use with 2.2mm POF Fiber.

Temperature Range 0°C - 70°C

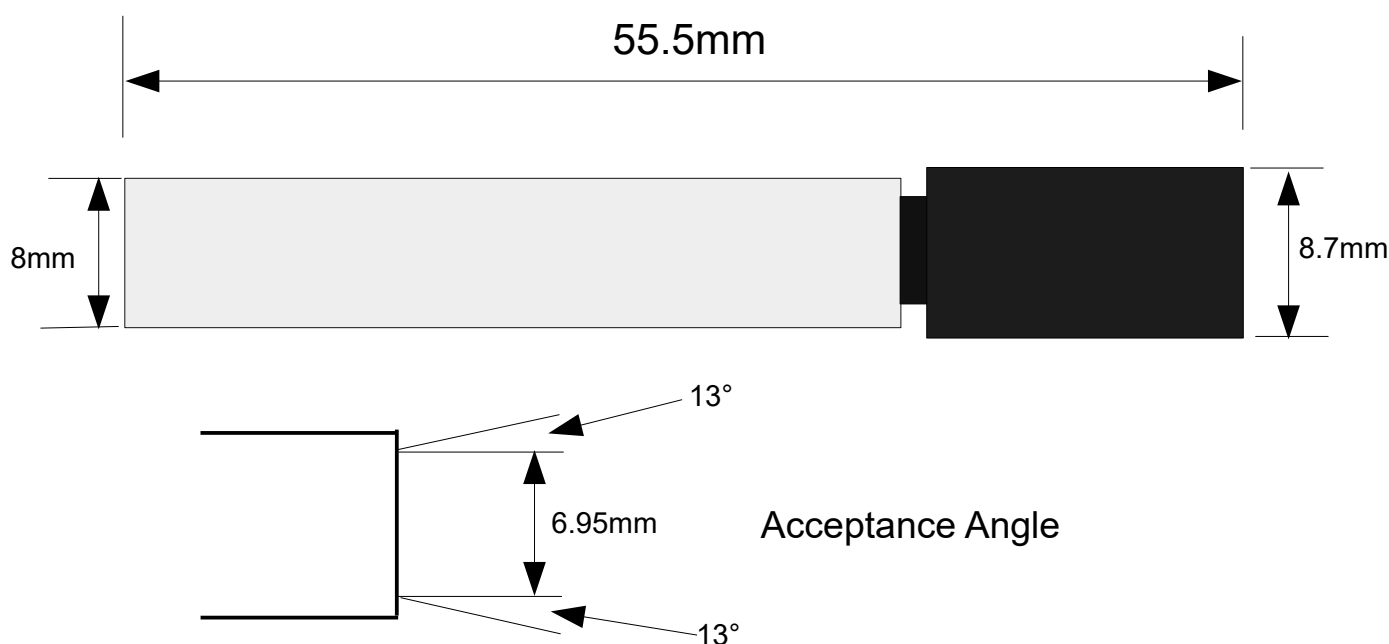

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-36A	0.315 ±0.001"	8mm ±0.2	8mm	55.5 ± 0.5mm	9mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.