



FEASA™ OPTICAL HEAD OH-6s

Product Datasheet

OH-6s




Application

For Testing LEDs in an RF Chamber, High Intensity LEDs that are located as close as 11mm centre to centre on a PCB with a fixture height restriction.

Temperature Range 0°C - 70°C

For use with 1mm POF Fiber.

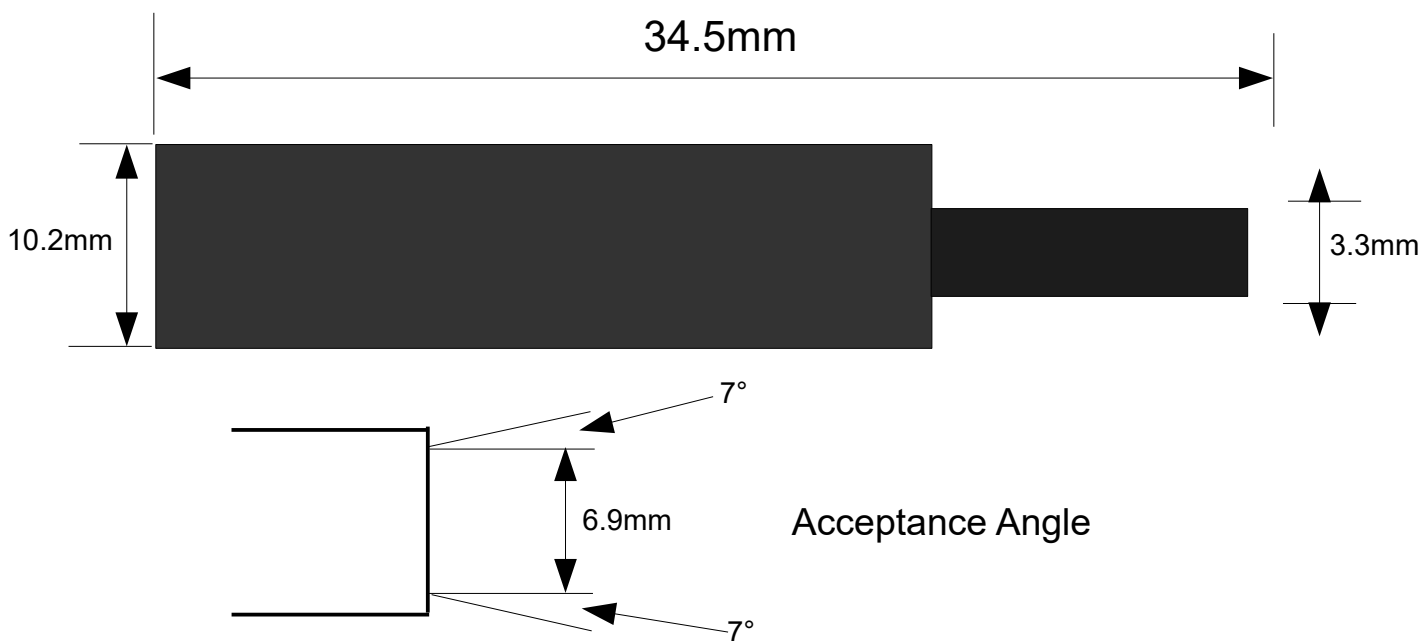

© Feasa Enterprises Ltd All rights reserved

Part No.	Plastic Body Diameter Imperial	Plastic Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-6s	0.400 ±0.005"	10.2mm ±0.15	10.2mm	34.5 ±0.5mm	11mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.