




FEASA™ OPTICAL HEAD OH-7LT

Product Datasheet


OH-7LT

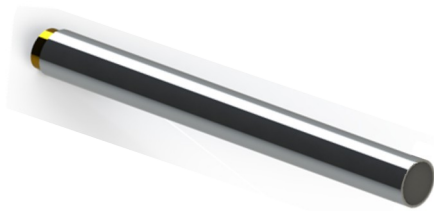

Application

For Testing Medium Intensity LEDs that are located as close as 5mm centre to centre on a PCB.
Designed to be used in Temperature Chambers.
For use with 1.1mm Glass Fiber.
Fiber is attached using Epoxy Glue.

Temperature Range -65°C to +125°C

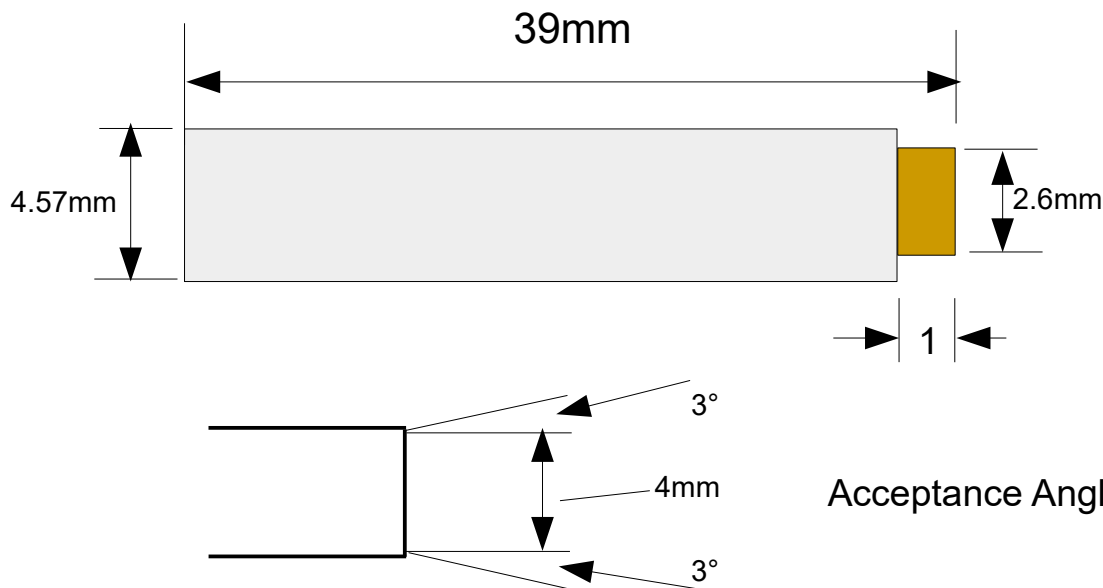

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Overall Length	Minimum Centre to Centre Distance
OH-7LT	0.180 ±0.002"	4.57 ±0.05	4.55mm	39 ±0.5mm	5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.

Page 1 of 1

Rev No.02 - 20th May 2026