



FEASA™ OPTICAL HEAD OH-8IR

Product Datasheet

OH-8IR





Application

For Testing Infrared LEDs with the Feasa Infrared LED Analyser that are located as close as 5mm centre to centre on a PCB.

For use with 1mm POF or 1.1mm Glass Fiber.

Temperature Range 0°C - 70°C

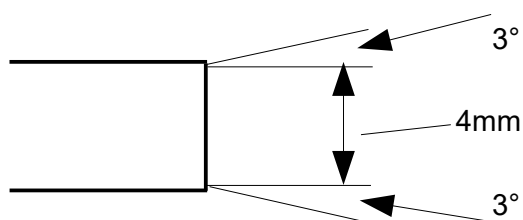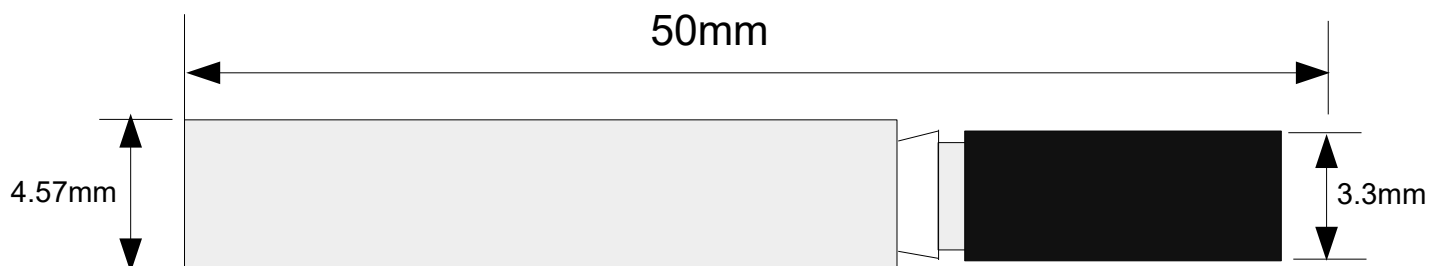

Acceptance Angle

© Feasa Enterprises Ltd All rights reserved

Part No.	Stainless Steel Body Diameter Imperial	Stainless Steel Body Diameter Metric	Recommended Drill Size in G10	Length including Screw Connector	Minimum Centre to Centre Distance
OH-8IR	0.180 ±0.002"	4.57 ±0.05	4.55mm	50 ± 0.5mm	5mm

Feasa Enterprises Ltd.

Castletroy • Limerick • Ireland

Telephone: + 353 61 330333 - Fax : + 353 61 330452 - Website: www.feasa.ie

Registered Office: Feasa Enterprises Limited, Holland Road, National Technology Park, Castletroy, Co.Limerick, Ireland.

Registered in Ireland, No. 106933. Copyright © 2011 Feasa Enterprises Limited. All rights reserved.